

# LAUNCH TECH USA



## TLT210-XT

*2-Post Lift • 10,000 lbs Capacity*


Multi Purpose full asymmetric lift that is height and width adjustable and may be installed in a standard or rotated column configuration to accommodate the smallest Cars to the largest SUVs' and Trucks. This ALI/ETL Certified lift comes with a one (1) year limited warranty.



# TLT 210-XT

## Features & Benefits


- 1 **Adjustable Column Height** - Provides an extra 6" of height adjustment for ease of installation with various ceiling heights.
- 2 **Adjustable Column Width** - Provides extra 6" of width adjustment for narrow service bays to custom fit your shop.
- 3 **Rubber Door Guards** - Provides added security against door damage.
- 4 **Outer Hose Guards** - Protects hydraulic hoses from damage.
- 5 **Stackable Foot Pad Extensions** - Extra tall applications are no problem with the two 6" tall and two 3" short extensions.
- 6 **Single Point Lock Release** - Allows technicians to disengage both column locks simultaneously.
- 7 **Heavy-Duty Arm Restraint System** - Oversize rugged steel gears, pins, and springs for trouble free operation.
- 8 **Double Telescoping Screw Pads** - Used with or without rubber pads offering 6.5" adjustment for complete vehicle coverage.
- 9 **Standard Asymmetric** - Lift installed with columns facing each other.
- 10 **Rotated Asymmetric** - Lift installed with columns offset - rotated.

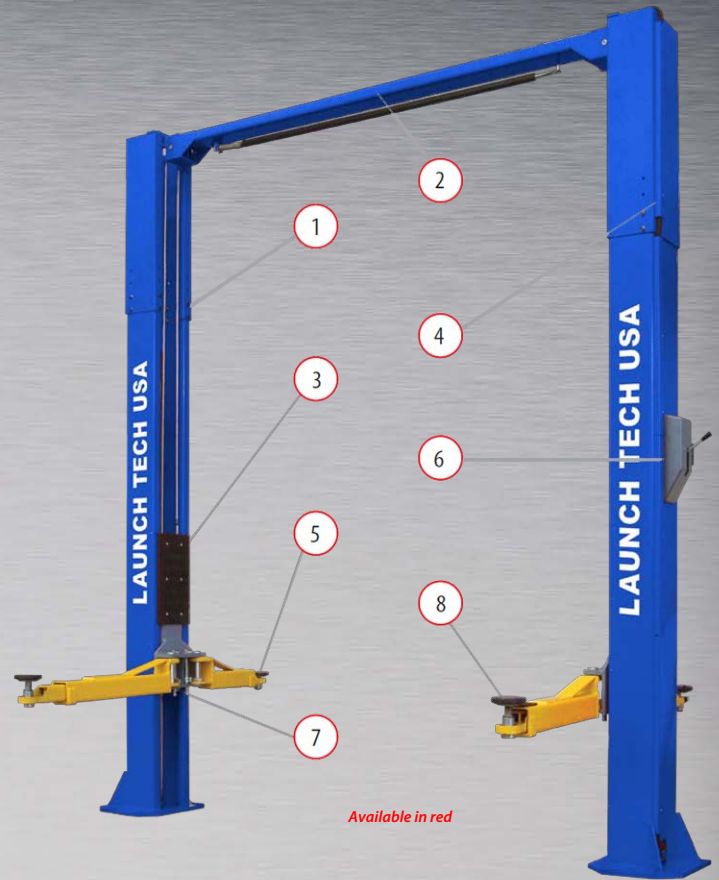

Available in red



1



2



3



4



5



6




7




8

A Word About Lift Certification: When found on an Automotive Lift such as the product represented by Launch Tech USA, this mark indicates that The Automotive Lift Institute (ALI) certifies that the TLT210-XT described herein complies with the applicable provisions of the American National Standards ANSI/ALI ALCTV 2006 and is Third Party Validated by the ETL Testing Laboratory.



9



10

### Specifications

	TLT210-XT Standard	TLT210-XT Rotated
A. Maximum Lifting Height	76.4" (1940mm)	76.4" (1940mm)
B. Minimum Column Height	143" (3634mm)	143" (3634mm)
C. Cylinder Full Height	145.2" (3688mm)	145.2" (3688mm)
D. Total width	136.6" (3470mm)	137.9" (3502mm)
E. Drive-Thru Clearance	98.4" (2500mm)	92" (2338mm)
F. Floor to Overhead Switch	140" (3556mm)	140" (3556mm)
G. Front Arm Reach (min / max)	23.6" (600mm) / 43.5" (1105mm)	23.6" (600mm) / 43.5" (1105mm)
H. Rear Arm Reach (min / max)	38.6" (980mm) / 61.8" (1570mm)	38.6" (980mm) / 61.8" (1570mm)
I. Screw Pad Height	4" (101mm) to 7.5" (190mm)	4" (101mm) to 7.5" (190mm)
J. Inside Column Width	110.2" (2800mm)	101.9" (2588mm)
Motor	2 HP	2 HP
Voltage	208-230 Volt/60hz./Single Phase	208-230 Volt/60hz./Single Phase
Rise Speed	54 Seconds	54 Seconds
Max. Load Per Arm	2500 lbs (1134 Kilos)	2500 lbs (1134 Kilos)
Min. Ceiling Height Required	143.5" (3644mm)	143.5" (3644mm)
Narrow Bay Setting	Deduct 5.9" (149mm)	Deduct 5.9" (149mm)
Maximum Column Height	149" (3874mm)	149" (3874mm)
Capacity	10,000 lbs	10,000 lbs
Ship Weight	1,570 lbs	1,570 lbs
Ship Dimensions	110"L x 24"W X 48"H	110"L x 24"W X 48"H