

CEMB[®] U S A

SM1100

Combines the best of multiple tire changer technologies; offering speed and efficiency throughout a wide range of applications. Easily adapts to ultra-low-profile, run-flat tires, special custom rims, every day wheels and even commercial light truck and industrial wheels.

www.cemb-usa.com



PROUDLY DISTRIBUTED BY



SM1100



Bead Press System

Greatly assists the operator in mounting stiff sidewall tires and difficult rims with deep drop centers.

Bead Roller System

Combines power with finesse for protective service of difficult, expensive wheels. Both rollers can be used for easy access to tire beads for lubrication, match-mounting and bead.

Center-Post

Twist lock clamping system safely secures virtually all wheels without damage with easy access to the rim and tire from the bottom side.

Wheel Lift

Eliminates back strain injury due to repetitive lifting of common larger, heavier wheels.




Side Shovel

Foot operated side mounted bead breaker shovel combines speed with power for everyday wheel applications to save time.



DIMENSIONS

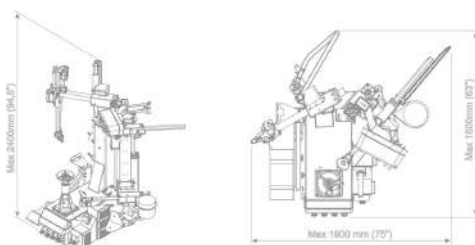

Power Supply:
Air Pressure:
Rim Diameter (Ext.):
Tire Diameter:
Max. Wheel Width:
Turn Table Speed:
Shipping Weight:

220V, 1ph, NEMA Plug L6-20P
115-145 psi (8-10 bar)
12" - 30"
36" (915 mm)
15" (380 mm)
8-15 rpm
1125 lbs (510 Kg)

CONTACT

CEMB[®] USA

CEMB USA - BL Systems Inc.
2873 Ramsey Road, Gainesville, GA 30501
(678) 717-1050 - sales@cemb-usa.com
www.cemb-usa.com