

## i-10

### Light Duty Two Post Lifts 10,000 lbs. Capacity

#### Features:

- Spot-Rite™ 3-stage front arms
  - Spot vehicles asymmetrically or symmetrically
- Hydraulic cylinders in each column:
  - Direct pull lifting technology
  - Top mounted
  - Full stroke
  - Cylinder rod inside carriage
- Single point lock release
- Includes adapter extensions and storage bracket
- Warranty:
  - Five years structural, 18 month parts, and six months labor
- ALI certified



Model Shown:  
FWD I10N400MBL  
10,000 lbs. capacity

#### Low-Profile Threaded Adapter Design:


The I10 features low-profile, oversized pads with multiple extensions to raise most vehicles on the road today. Includes four (each) adapter extensions at 3.5" and 5"



#### I10 Spot-Rite™ 3-Stage Front Arm Design

Position the vehicle doors in front of or behind the lift columns to prevent door damage and allow easy technician access!

Spot-Rite™  
3-Stage Front Arms  
accommodate vehicles  
both symmetrically  
and asymmetrically.

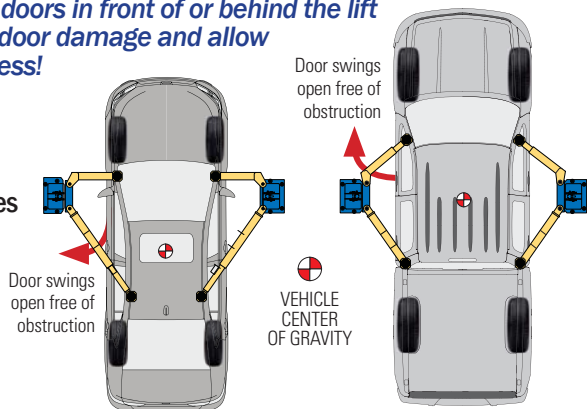

Asymmetric Vehicle Placement

Symmetric Vehicle Placement

SPECIFICATIONS	I10N400MBL
Capacity	10,000 lbs. (4535kg)
Max. Rise w/ 5" extension	76 -1/4" (1937mm)
Overall Height	143" (3632mm)
Overall Width	131" or optional 137" (3327/4380mm)
Drive through clearance	99" or optional 105" (2515/2667mm)
Overhead switch height	137-5/8" (3496mm)
Front reach (Min/Max)	23" / 44-1/2" (584mm/1130mm)
Rear reach (Min/Max)	36" / 58" (914mm / 1473mm)
Min/Max adapter height	3-3/4" (95mm) no adapter extension 8-3/4" (222mm) w/5" adapter extension
Width inside column	109" or optional 115" (2769mm / 2921mm)
Voltage/Amps	208/230, 15 amps; 208/230, 16 amps
Motor/phase	1ph*/2HP/50Hz; 1ph*/2HP/60Hz
Ceiling height required	144" (3658mm)

\*3-phase available at additional cost

Lifts available in blue and red

Specifications subject to change without notice or liability.