

**Brand: BendPak**  
**Models: XPR-9S**  
**Description: Floorplate Style Two-Post Lift / Screw Pads / Chain Drive**


Our XPR-9S symmetric two-post lift features an adjustable top beam to accommodate wide or narrow installation set-ups. This unique configurable design allows you to choose the best setting for your specific space or vehicle lifting requirements. The highly sophisticated yet simple and dependable XPR-Series design requires very little service or maintenance for an overall lower cost of ownership. All BendPak's XPR two-post models feature dual "direct-drive" low-pressure cylinders, maintenance-free UHMW load bearings, single-piece columns, extra-tall lifting carriages and triple-telescoping arm configuration for increase arm positioning versatility.

The XPR-9S features double-telescoping screw pads with gouge and tear-resistant polyurethane pads to help increase workplace safety and reduce operating costs. A set of our 63 mm stacking adapters included as standard accessories.

- 9,000-lb. lifting capacity
- Shorter columns for low-ceiling installations
- Adjustable width design configures for wide or narrow installation
- Extended rise gives you over 6-feet of under clearance
- Single-piece columns
- Single point safety release
- Drop-end arms provide a lower pad height
- Triple-telescoping arms provide increased range for lifting point access
- Chain lifting system combined with dual hydraulic cylinders
- Electric/hydraulic power system
- Large, 20" x 19" steel base plates
- Self-lubricating dura-glide polyethylene bearing system
- Safety locks in each column spaced every 3-inches
- Automatic arm restraints
- Heavy-duty dual 3/8" equalizer cables with oversize cable sheaves
- 4-piece 63 mm stackable adapter set comes standard



MODEL	XPR-9S
Lifting Capacity*	9,000 lbs. / 4,082 kg
*Max Capacity / Front Axle	4,500 lbs. / 2,041 kg
*Max Capacity / Rear Axle	4,500 lbs. / 2,041 kg
A - Height Overall: (*)	113" / 2,870 mm
B - Width Overall: (NARROW)	132" / 3,353 mm
B - Width Overall: (WIDE)	145" / 3,683 mm
C - Width Outside of Columns: (NARROW)	126-3/4" / 3,225 mm
C - Width Outside of Columns: (WIDE)	139-3/4" / 3,555 mm
D - Floor Pan Height:	1-3/4" / 44 mm
E - Inside Columns: (NARROW)	105" / 3,208 mm
E - Inside Columns: (WIDE)	118" / 3,538 mm
F - Reach (Front Arm Min.):	27-1/2" / 698 mm
G - Reach (Front Arm Max.):	51-1/2" / 1,308 mm
H - Reach (Rear Arm Min.):	34" / 863 mm
I - Reach (Rear Arm Max.):	54-1/2" / 1,384 mm
J - Min. Pad Height:	4" / 102 mm
K - Rise:	69" / 1,753 mm
L - Max Lift Height (Pad Only):	73" - 75" / 1,854 - 1,905 mm
M - Max Lift Height (Screw Pad & 63mm Adapter):	75.5" - 77.5" / 1,917 mm - 1,968 mm
N - Drive-Thru Clearance: (NARROW)	93" / 2,362 mm
N - Drive-Thru Clearance: (WIDE)	106" / 2,692 mm
Motor (**)	220 VAC / 60 Hz / 1 Ph
Time of full Rise:	45 sec
Max Load Per Arm:	2,250 lbs. / 1,021 kg

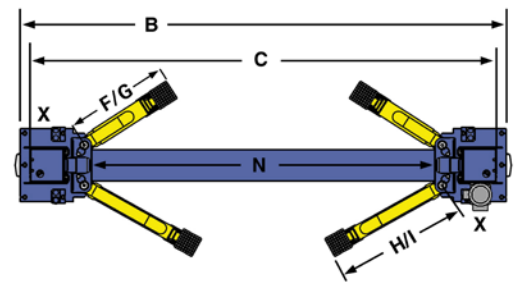

NOTE: Power unit can be located at either X location.

