

TWO-POST HEAVY-DUTY LIFTS

AMGO's latest OH-18 boasts heavy-duty construction and offers a high lifting capacity up to 18000lbs. It features long, sturdy carriages for enhanced stability and is equipped with two types of rubber pads for various vehicles. Additionally, it incorporates AMGO's 3in1 technology to effortlessly reach different height settings.



OH-18

Main Features

- ✓ Lifting capacity: 18,000 lbs;
- ✓ High quality dual hydraulic direct-drive cylinders;
- ✓ 4 two-stage sturdy arms ensure the heavy load stability;
- ✓ Single-point manual safety lock release that simultaneously unlocks both columns from one side;
- ✓ The clear-floor design provides an unobstructed workspace;
- ✓ The overhead safety shut-off device for maximum vehicle protection;
- ✓ Exclusive: adjustable three height setting accommodates varying service ceiling heights;
- ✓ Extremely long carriages are equipped to enhance the stability and durability;
- ✓ Self-lubricating UHMW polyethylene sliders
- ✓ Automatic arms restraint;
- ✓ Aero sync cables come standard;
- ✓ Detachable toe guard and tool tray come standard;
- ✓ Both heavy-duty single-screw rubber pad and saddle adapter come as standard;
- ✓ Both 3" and 6" extension adapters come as standard.



Single point safety release makes it easier for operators to unlock both columns from one column.



ETL certified AMGO power unit.



Both heavy duty single-screw rubber pads and saddle adapters come as standard.



Both 3" and 6" extension adapters come as standard.




Optional heavy duty extreme wide saddle adapter. Kits No. 21109



Standard heavy-duty 2-stage arms (P/N of Lifting arm assy.:1102794001C-03).

SPECIFICATIONS

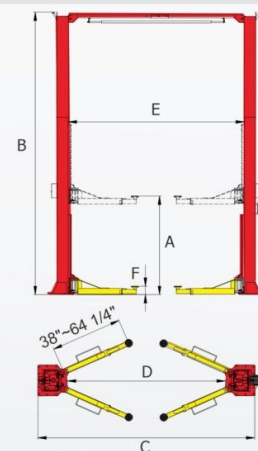

Model	OH-18
Lifting Capacity	18,000 lbs
Lifting Time	84s
Max. Lifting height: (w/o extension adapter)	74 7/8"~76 1/4"
Max. Lifting height: (w/ extension adapter)	83 7/8"~85 1/4"
Max. lock height: (w/o extension adapter)	72 7/8"~74 1/4"
Max. lock height: (w/ extension adapter)	81 7/8"~83 1/4"
Overall Height:(low setting)	174"
Overall Height:(Medium setting)	186"
Overall Height:(High setting)	198"
Overall Width	151 15/16"
Drive-Thru Clearance	110 7/16"
Width Between Columns	123 1/2"
Minimum Pad Height	6 7/8"
Gross	2,906 lbs
Motor	2.0HP,220V 60Hz,single phase

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel: (803) 505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA
Tel: (214) 377-8091