

TWO-POST SUPER ASYMMETRIC LIFT

AMGO OHX-10 is well known for its excellent performance in elaborately structure. It boasts 10000lbs capacity, is built with single-piece column, split-structure top beam and extremely long carriages that ensuring easier installation and easier maintenance. Suitable for workshop and garage over 12ft, it offers width extension as option, and features AMGO Super Asymmetric technology for added convenience during loading.



OHX-10

Main Features

- ✓ Lifting capacity: 10,000 lbs;
- ✓ High quality dual hydraulic direct-drive cylinders;
- ✓ The **SuperAsymmetric** arms allow an symmetrical or an asymmetrical loading, ensuring adequate door clearance;
- ✓ Single-point manual safety lock release that simultaneously unlocks both columns from one side;
- ✓ The clear-floor design provides an unobstructed workspace;
- ✓ The overhead safety shut-off device for maximum vehicle protection;
- ✓ Easy installation with a single column piece;
- ✓ Self-lubricating UHMW polyethylene sliders;
- ✓ Automatic arms restraint;
- ✓ Standard areo sync cables;
- ✓ Detachable toe guard and tool tray come standard;
- ✓ Standard double-screw rubber pad (pin dia 2") with 3" extension adapters.



Single point safety release makes it easier for operators to unlock both columns from one column.



Extremely long carriages, more than twice the length of comparable models on the market;



Optional Width Extension Kits
With these kits the width between posts is adjusted from 112 1/4" to 118-1/2" Kits No.: 21004



Standard double-screw rubber pad (pin dia 1/2") with 3" extension adapters.




Automatic arm restraints



SuperAsymmetric arms allow to load different vehicles in an asymmetric or symmetric configuration.

SPECIFICATIONS

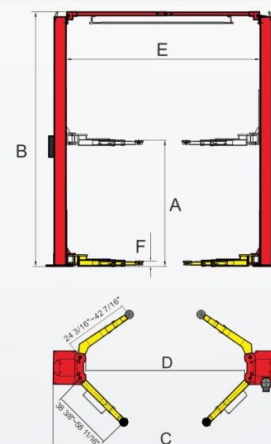

Model	OHX-10
Lifting Capacity	10,000 lbs
Lifting Time	57s
Max. Lifting height: (w/o extension adapter)	71 7/16"~73 3/8"
Max. Lifting height: (w/ extension adapter)	74 7/16"~76 5/16"
Max. lock height: (w/o extension adapter)	69 5/8"~71 1/2"
Max. lock height: (w/ extension adapter)	72 5/8"~74 1/2"
Overall Height:(low setting)	B 144"
Overall Width	C 134 15/16"
Drive-Thru Clearance	D 99 13/16"
Width Between Columns	E 112 1/4"
Minimum Pad Height	F 3 9/16"
Gross Weight	1,592 lbs
Motor	2.0HP, 220V 60Hz, single phase

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel: (803) 505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA
Tel: (214) 377-8091