

## TWO-POST SUPER ASYMMETRIC LIFT

*AMGO OHX-10H is designed for exceptionally high-clearance lifting, reaching up to a maximum height of 87 3/4", which makes working beneath a vehicle more comfortable. Featuring two height settings reaching up to 14ft and extremely long carriages, which guarantee strong performance, stability, and minimal maintenance. With 10,000lbs capacity, this lift is the ideal choice to perform your professional lifting services.*



OHX-10H

### Main Features

- ✓ Lifting capacity: 10,000 lbs;
- ✓ High quality dual hydraulic direct-drive cylinders;
- ✓ The **SuperAsymmetric** arms allow a symmetrical or an asymmetrical loading, ensuring adequate door clearance;
- ✓ Single-point manual safety lock release that simultaneously unlocks both columns from one side;
- ✓ The clear-floor design provides an unobstructed workspace;
- ✓ The overhead safety shut-off device for maximum vehicle protection;
- ✓ Two standard height settings accommodate various ceiling heights;
- ✓ Additional optional kits are available to extend the height and width to support a more comprehensive service;
- ✓ Self-lubricating UHMW polyethylene sliders;
- ✓ Automatic arms restraint;
- ✓ Areo sync cables come standard;
- ✓ Detachable toe guard and tool tray come standard;
- ✓ Standard double-screw rubber pad ( pin dia 2" ) with 3" extension adapters.



Single point safety release makes it easier for operators to unlock both columns from one column.



Extremely long carriages, more than twice the length of comparable models on the market.



Optional width extension kits, that can extend the width between columns from 112 1/4" to 118 1/8". Kits No.: 21005



Two standard height settings to accommodate different ceiling heights




Automatic arm restraints



**SuperAsymmetric** arms allow to load different vehicles in an asymmetrical or symmetrical configuration.

### SPECIFICATIONS

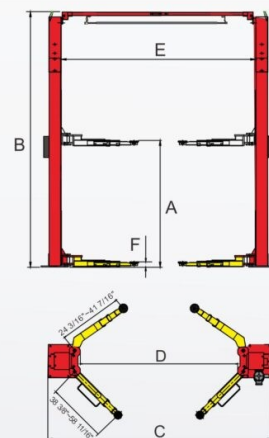

| Model                                        | OHX-10H                        |
|----------------------------------------------|--------------------------------|
| Lifting Capacity                             | 10,000 lbs                     |
| Lifting Time                                 | 63s                            |
| Max. Lifting height: (w/o extension adapter) | 78 3/4"~80 5/8"                |
| Max. Lifting height: (w/ extension adapter)  | 81 3/4"~83 5/8"                |
| Max. lock height: (w/o extension adapter)    | 77 3/16"~79 1/16"              |
| Max. lock height: (w/ extension adapter)     | 80 3/16"~82 1/16"              |
| Overall Height:(low setting)                 | 157"                           |
| Overall Height:(high setting)                | 167 3/16"                      |
| Overall Width                                | 134 15/16"                     |
| Drive-Thru Clearance                         | 99 13/16"                      |
| Width Between Columns                        | 112 1/4"                       |
| Minimum Pad Height                           | 3 9/16"                        |
| Gross Weight                                 | 1,709 lbs                      |
| Motor                                        | 2.0HP, 220V 60Hz, single phase |

### AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA  
Tel: (803) 505-6410

TX Division: 4310 Adler, Suite 200, Dallas, TX 75211, USA  
Tel: (214) 377-8091