

AUTEL[®] VEHICLE LIFTS **A LIFT FOR EVERY BAY**



AULS12ALOR1
AULS14ALOR1
AULS16ALOR1
AULS16ALOR1X



SURFACE MOUNTED ALIGNMENT SCISSOR LIFT

12K LBS Capacity | PN: AULS12ALOR1 **14K** LBS Capacity | PN: AULS14ALOR1
16K LBS Capacity | PN: S16ALOR1 **NEW** **16K** LBS Capacity | PN: S16ALOR1X **NEW**
with extended runway



AULS12ALOR1T
AULS14ALOR1T
AULS16ALOR1T
AULS16ALOR1TX



FLUSH MOUNTED ADAS BAY MAX SCISSOR LIFT

12K LBS Capacity | PN: AULS12ALOR1T **14K** LBS Capacity | PN: AULS14ALOR1T
16K LBS Capacity | PN: S16ALOR1T **NEW** **16K** LBS Capacity | PN: S16ALOR1TX **NEW**
with extended runway

PN: S16ALOR1TX
COMPATIBLE WITH
RIVIAN



AULS12ALOR1FM
AULS14ALOR1FM
AULS16ALOR1FM
AULS16ALOR1FMX




NEW LIFT STYLE

FLUSH MOUNTED SCISSOR ALIGNMENT LIFT


12K LBS Capacity | PN: S12ALOR1FM **14K** LBS Capacity | PN: S14ALOR1FM
16K LBS Capacity | PN: S16ALOR1FM **16K** LBS Capacity | PN: S16ALOR1FMX
Extended runway included



AUL415ALORR1P
AUL415ALOXR1P
AUL419ALCRR1P
AUL419ALCXR1P

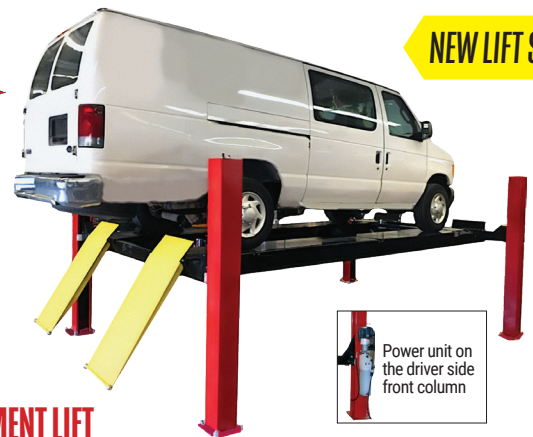

NEW LIFT STYLE



4-POST ALIGNMENT LIFT

15K LBS Capacity | PN: 415ALORR1P **15K** LBS Capacity | PN: 415ALOXR1P
Open Post Open Post with extended runway
19K LBS Capacity | PN: 419ALCRR1P **19K** LBS Capacity | PN: 419ALCXR1P
Closed Post Closed Post with extended runway

VEHICLE LIFT ACCESSORIES & REPLACEMENT PARTS



Surface Mount Lift Drive-Thru Ramp Kit
Smoothly drive on/off the lift without repositioning. Designed for surface-mount scissor lifts.
PN: SDTKS (Set of 2)




Surface-Mount Approach Drive-Thru Ramp Kit
Enable drive-thru capability on 4-post alignment lifts with 15k LBS capacity.
PN: 154PDTK (Set of 2)



Scissor Surface Mounting Kit
Designed to convert flush-mount scissor lifts into surface-mount configuration.
PN: SSMKIT

Stainless Steel Turn Plates
replacement turn plates for 4-post and surface-mounted alignment systems. PN: STP (Set of 2)



Low Profile Ramp Extension Kit
Extends lift approach angle for smoother drive-on/off operation.
PN: LPRE (Set of 2)



1.855.288.3587
USSUPPORT@AUTEL.COM




AUTEL ACADEMY TRAINING
autel.us/academy


WEB: AUTEL.US
FOLLOW US: @AUTELTOOLS

AUTEL[®]

	12K CAPACITY	14K CAPACITY	16K CAPACITY	4-POST 15K CAPACITY	4-POST 19K CAPACITY
CAPACITY	12,000 lbs / 5.4 T	14,000 lbs / 6.4 T	16,000 lbs / 7.3 T	15,000 lbs / 6.8 T	19,000 lbs / 8.6 T
ALI CERTIFICATION	Yes	Yes	Yes	Yes	Yes
STYLE	Open Front & Rear	Open Front & Rear	Open Front & Rear	Open Front	Closed Front
A RAISED HEIGHT	74" (1,880mm)	74" (1,880mm)	74" (1,880mm)	75" (1,905mm)	74" (1,880mm)
B LOWERED HEIGHT	10 3/4" (273mm) SURFACE 0" (0mm) FLUSH	10 3/4" (273mm) SURFACE 0" (0mm) FLUSH	10 3/4" (273mm) SURFACE 0" (0mm) FLUSH	8 3/8" (213mm)	8 7/8" (225mm)
C OVERALL LENGTH STANDARD	242 3/4" (6,147mm)	260 3/4" (6,604mm)	260 3/4" (6,604mm)	260 1/2" (6,617mm)	274 3/8" (6,969mm)
OVERALL LENGTH EXTENDED	18" (457mm) With Purchase of P/N: LPRE	18" (457mm) With Purchase of P/N: LPRE	275 3/4" (7,004mm) With Purchase of P/N: LPRE	287 1/2" (7,303mm)	301 3/8" (7,655mm)
D DECK LENGTH STANDARD	185" (4,699mm)	203" (5,156mm)	203" (5,156mm)	211" (5,359mm)	211" (5,359mm)
DECK LENGTH EXTENDED	—	—	221" (5,613mm) With Purchase of P/N: X	238" (6,045mm)	238" (6,045mm)
E WIDTH BETWEEN RUNWAYS	41" (1,041mm)	41" (1,041mm)	41" (1,041mm)	41" (1,041mm)	41" (1,041mm)
F RUNWAY DECK WIDTH	26" (660mm)	26" (660mm)	26" (660mm)	26" (660mm)	26" (660mm)
G OVERALL WIDTH FRONT/REAR	91 1/2" (2,324mm)	91 1/2" (2,324mm)	91 1/2" (2,324mm)	143" / 137 1/2" (3,632mm) / (3,493mm)	150" (3,810mm)
H MAX COLUMN HEIGHT	—	—	—	101 1/2" (2,565mm)	86" (2,184mm)
MIN. 4 WHEEL ALIGNMENT WB	84" (2,134mm)	84" (2,134mm)	84" (2,134mm)	84" (2,134mm)	84" (2,134mm)
MAX. 4 WHEEL ALIGNMENT WB	164" (4,165mm)	164" (4,165mm)	164" (4,165mm)	164" (4,165mm)	164" (4,165mm)
MIN. 2 WHEEL ALIGNMENT WB STANDARD	173" (4,394mm)	173" (4,394mm)	173" (4,394mm)	177" (4,495mm)	177" (4,495mm)
MAX. 2 WHEEL ALIGNMENT WB EXTENDED	—	—	—	204" (5181mm)	204" (5181mm)
LIFT TIME	58 Seconds	58 Seconds	58 Seconds	76 Seconds	99 Seconds
POWER REQUIREMENTS	230V, 60HZ, 1PH 30AMP	230V, 60HZ, 1PH 30AMP	230V, 60HZ, 1PH, 30AMP	230V, 60HZ, 1PH, 25AMP	230V, 60HZ, 1PH, 25AMP
INCLUDED JACKING BEAM	2 X 6,000 lbs / 2.7 T	2 X 7,000 lbs / 3.2 T	2 X 8,000 lbs / 3.6 T	2 X 7,500 lbs / 3.5 T	2 X 9,000 lbs / 4.1 T
SHIPPING WEIGHTS	6,200 (2,812kg)	6,400 (2,903kg)	6,401 (2,903kg)	5,600 (2,540kg)	6,300 (2,857kg)
PART NUMBERS	AULS12ALOR1 SURFACE AULS12ALOR1T BAY MAX S12ALOR1FM FLUSH	AULS14ALOR1 SURFACE AULS14ALOR1T BAY MAX S14ALOR1FM FLUSH	S16ALOR1 SURFACE S16ALOR1X SURFACE, EXTENDED RUNWAY S16ALOR1T BAY MAX S16ALOR1TX BAY MAX, EXTENDED RUNWAY S16ALOR1FM FLUSH S16ALOR1FMX FLUSH, EXTENDED RUNWAY	415ALORR1P OPEN 415ALOXR1P OPEN, EXTENDED RUNWAY	419ALCRR1P CLOSED 419ALCXR1P CLOSED, EXTENDED RUNWAY

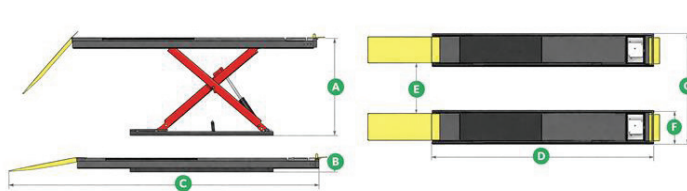

SCISSOR ALIGNMENT

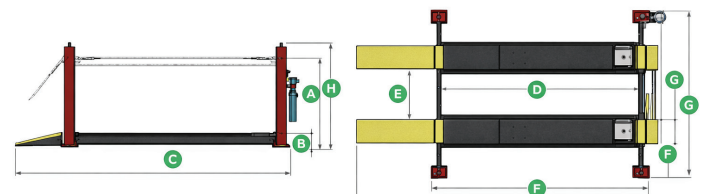

4-POST ALIGNMENT



VIEW ALL AUTEL LIFTS



1.855.288.3587
USSUPPORT@AUTEL.COM



AUTEL ACADEMY TRAINING
autel.us/academy

WEB: AUTEL.US
FOLLOW US: @AUTELTOOLS

AUTEL