AMGO® Hydraulics





EXCLUSIVE FEATURE


Double-S shape column

MODEL 409-HP


AMGO 409-HP Pro series is built for full range vehicles including car, SUV and light truck. It boasts a lifting capacity at 9000lbs, can handle some tough works such as parking longer and taller vehicles. It's easy to install, requires barely maintenance and offers great mobility.


FEATURES

- Lifting capacity: 9,000lbs.
- AMGO ETL certified power unit comes as standard.
- High quality cylinder is designed and made to a high standard.
- **AMGO's patented design** concealed safety lock control device, with manual single-point lock release.
- Aero standard cables are included as standard.
- Double-S shaped columns are utilized to enhance strength.
- Non-slip platforms come with foldable drive-in ramps as standard.
- Support back to back installation to minimize space occupancy.
- Power side column can be installed at any corner.
- Extremely high lifting is suitable to park taller vehicles .
- Pull rope comes as standard.



Double safety locks provide additional safety.

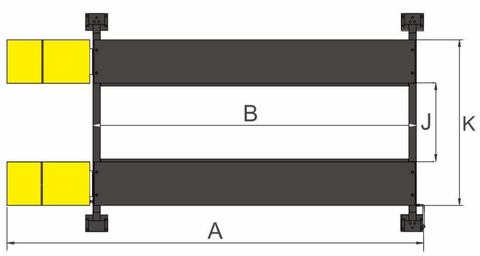


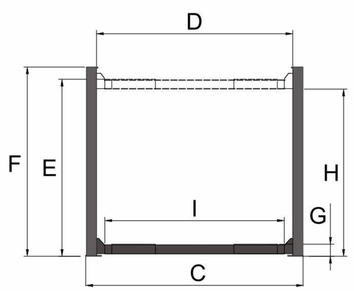

SPECIFICATIONS

Model	Lifting Capacity	Lifting Time	A	B	C	D	E		F	G	H		I	J	K	Gross Weight	Motor Power
			Overall Length (Inc.Ramps)	Overall Length (Without Ramps)	Overall Width	Width Between Posts	Max. Lifting Height	Max. locking height	Overall Height	Minmum Height	Max. Underneath Height	Max. Lock Underneath runway	Drive-Thru Clearance	Width Between Runways	Outside Edge of Runways		
409-HP	9,000lbs	174S	238 1/8"	197 3/4"	109 5/16"	99 5/8"	88 1/16"	85 5/16"	96 5/8"	6 1/8"	82 9/16"	79 13/16"	88 7/16"	42 3/8"	82 3/8"	1,956lbs	1.0HP,110V

EXCLUSIVE FEATURES

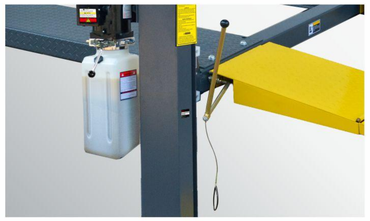


AMGO's patented design concealed safety lock control device, with manual single-point lock release.



Special structure design to allow back-to-back installation.

OPTIONAL PARTS

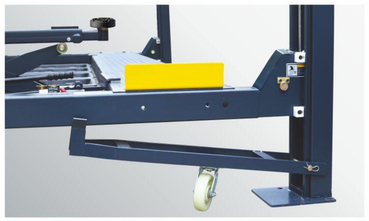

Optional Caster kits help easily maneuver the parking lift. One set 4pcs.
Kits No: 40801



Optional Motor Protective cover (with emergency stop switch).
Kits No.: 40810

Optional extended aluminum drive-in ramp. P/N.: 40815, each lift needs 2 units.

Optional plastic oil tray (1 set, 4pcs)
Kits No.: 40807.



Optional adjustable Jack Tray (adj. range: 36 1/4"-46 1/2").
Kits no. 40816.



Optional RJ-6H sliding jack with hand pump, 2.5" extension adapters included. Capacity 6,000lbs.

AMGO HYDRAULIC CORPORATION

SC Division: 1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA
Tel:(803)505-6410

TX Division: 4310 Adler, Suite #200, Dallas, TX 75211, USA
Tel:(214)377-8091

AMGO® Hydraulics
We're More Than a Manufacturer. We Are the Leader in Innovation,Technology and Service
www.amgohyd.com