

HD-7MZ

Four-Post Lifts

SKU# 5175508

7,000-lb. Capacity, Super-Tall Four-Post Lift, Vehicle Display Platform

Questions? Contact BendPak's Sales Team

sales@bendpak.com | 1-800-253-2363

Monday - Friday, 6AM to 4:30PM PST

Amazingly Tall Vehicle Display Lift for Dealers

The HD-7MZ was created as the exclusive showroom vehicle display lift for dealerships nationwide. As part of our push to offer dealers better vehicle display options, the HD-7MZ stacks two cars in a "jewel box" glass display in front of their dealership. Attract customer's passing by on nearby highways or within the main showroom. Our specially designed four-post lift features full 360-degree visibility of the car from all sides and includes an attractive low-sheen, rich black powder coat finish. More than just unique styling, this car lift is easy to use and features a platform locking system that safely secures raised vehicles in varied height positions for an open display viewing area. Its hydraulic drive system is hidden under the fully covered platforms for a clean, clutter-free look. The HD-7MZ four-post lift has a 7,000-lb. lift capacity and 188" long runways to accommodate a variety of vehicle types and wheelbases.



Features

- 7,000-lb. maximum lifting capacity
- Super tall rise of delivers 12-feet of lifting height
- Low sheen black color
- Underside of runways are shielded by full-length covers
- Electric / hydraulic power system
- Single hydraulic cylinder mounted underneath runway
- Internal anti-sway slider blocks in each column
- Oversized self-lubricating cable rollers
- Features heavy-duty 3/8" aircraft cable
- Rugged 1.25" roller axles
- Multi-position safety locks in each column
- Adjustable lock ladders
- Ramps feature non-skid surface
- Push-button pneumatic safety release

Note: An air supply (minimum 30 psi / 3 CFM) is required for the safety-lock mechanisms to disengage. It is solely the responsibility of the end-user to provide, install and maintain the air supply.

Not all BendPak lift models meet the standards as prescribed by ANSI/ALI ALCTV-2011 or ANSI/UL 201. Consult www.autolift.org for a complete list or contact BendPak via contact@bendpak.com.




Why get a display lift?

Auto dealerships are always looking for an edge when it comes to their displays. The newest vehicles, or the ones most likely to attract customer attention, need to be prominently shown and visible from the street. The narrow dimensions of this lift, as well as its sleek, low-sheen black coloration, allow it to blend seamlessly into busy lots and showrooms. This way, the vehicles are all that people notice. Its 12-foot high rise is also perfect for getting cars seen from over the highway or across the street. Designed originally for dealerships of any size, this lift is perfect for anyone desiring to gain an edge over the competition. Our job is to help make your inventory look its best, so you can increase your dealership's foot traffic and close more deals.

Specifications

Model	HD-7W
Style	Wide Width / Super Tall Lift
SKU#	5175508
Lifting Capacity	7,000 lbs. (3,175 kg)
A - Min. Runway Height	4.5" (114 mm)
B - Max. Rise	140" (3,556 mm)
C - Max. Lifting Height	145" (3,683 mm)
D - Overall Width	110.25" (2,800 mm)
E - Outside Length	198" (5,029 mm)
F - Overall Length	224.5" (5,702 mm)
G - Height of Columns	158" (4,013 mm)
H - Width Between Columns	100" (2,540 mm)
I - Drive-Thru Clearance	86.5" (2,197 mm)
J - Runway Width	19" (483 mm)
K - Length of Runways	188" (4,775 mm)
L - Width Between Runways	37.5" (952 mm) - 44.5" (1,130 mm)
M - Runway Centerline	56.5" (1,435 mm) - 63.5" (1,613 mm)
N - Outside Edge of Runways	75.5" (1,918 mm) - 82.5" (2,096 mm)
Min Wheelbase @ Capacity	135" (3,429 mm)
Min Wheelbase @ 75% Capacity	115" (2,921 mm)
Min Wheelbase @ 50% Capacity	95" (2,413 mm)
Min Wheelbase @ 25% Capacity	80" (2,032 mm)
Time to Full Rise	60 sec
Locking Positions	30
Lock Spacing	every 4" (102 mm)
Motor	208-230 VAC / 50-60 Hz / 1 Ph

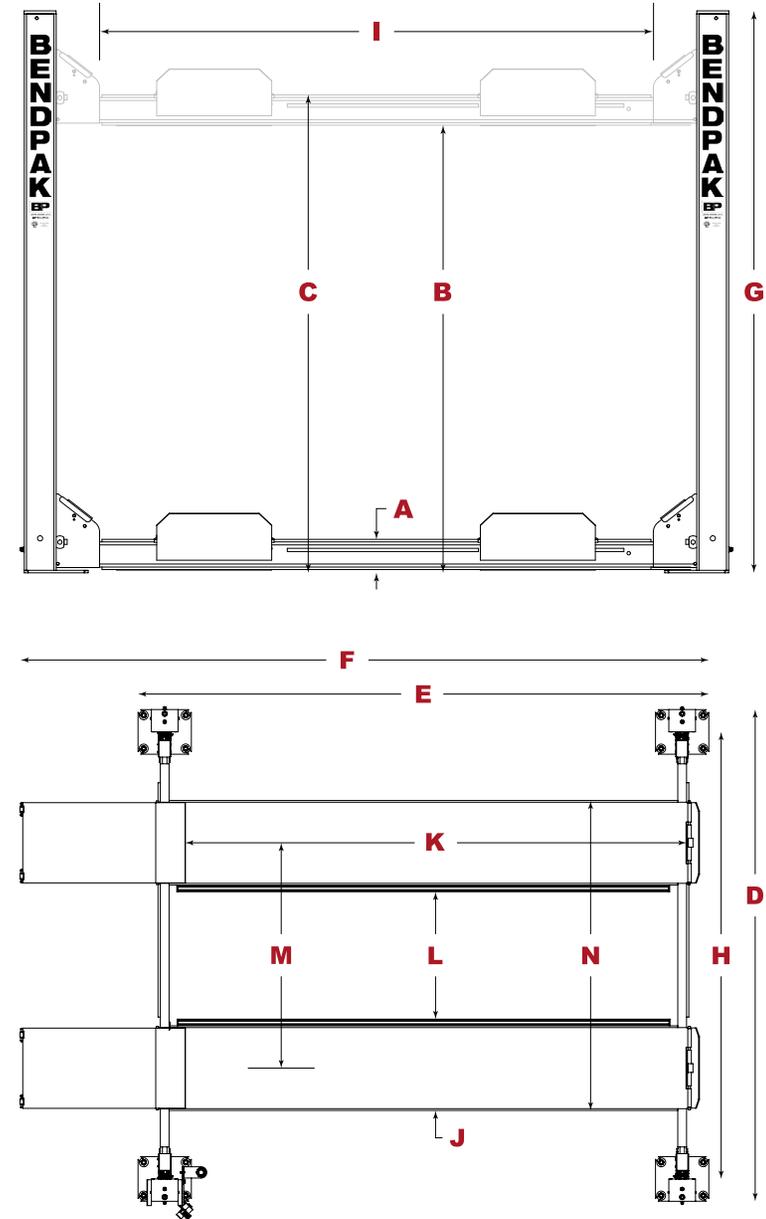

Not all BendPak lift models meet the standards as prescribed by ANSI/ALI ALCTV-2011 or ANSI/UL 201. Consult www.autolift.org for a complete list or contact BendPak via contact@bendpak.com.